


REVISION			
REV	DATE	DESCRIPTION	APPRO.BY
A/0	2013/03/13	NEW	Nancy

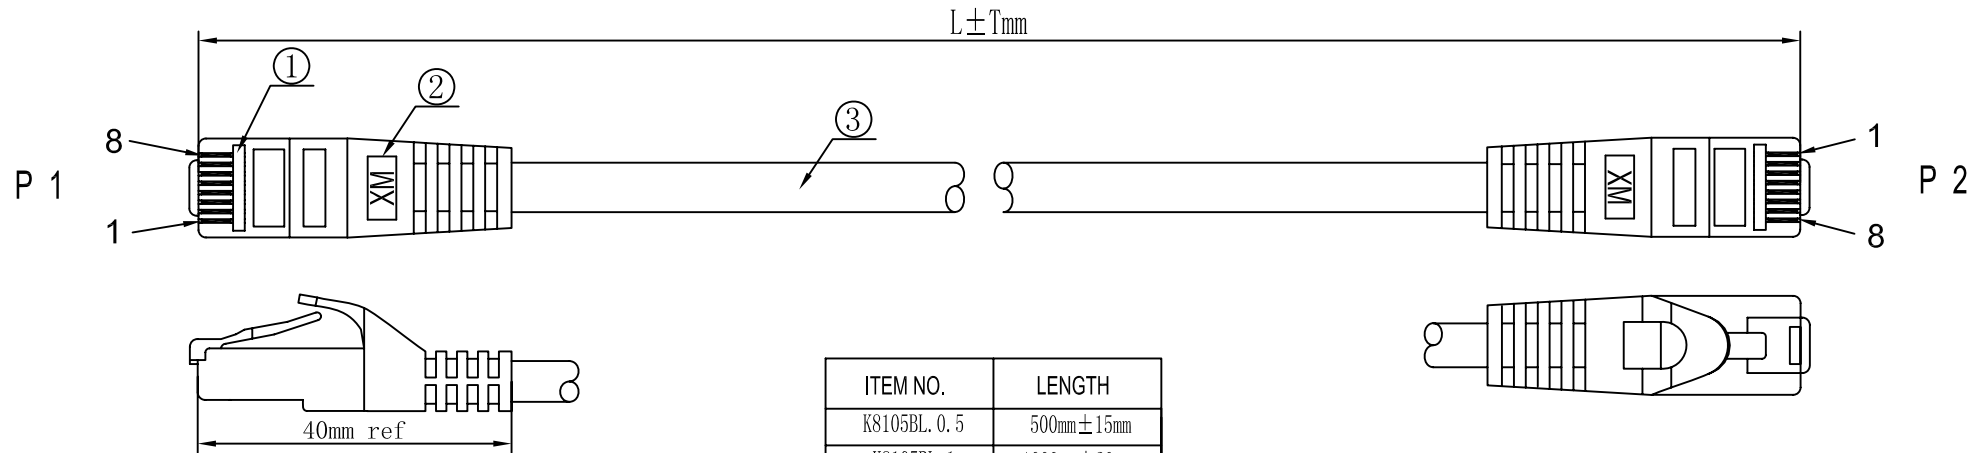

ITEM NO.	LENGTH
K8105BL. 0.5	500mm ± 15mm
K8105BL. 1	1000mm ± 20mm
K8105BL. 2	2000mm ± 30mm
K8105BL. 3	3000mm ± 50mm
K8105BL. 5	5000mm ± 100mm
K8105BL. 7.5	7500mm ± 100mm
K8105BL. 10	10000mm ± 200mm
K8105BL. 15	15000mm ± 200mm
K8105BL. 20	20000mm ± 300mm
K8105BL. 30	30000mm ± 300mm

WIRING DIAGRAM

P 1	P 2
1	1 WHITE-ORANGE
2	2 ORANGE
3	3 WHITE-GREEN
6	6 GREEN
4	4 BLUE
5	5 WHITE-BLUE
7	7 WHITE-BROWN
8	8 BROWN

NOTE:

1. ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE IS NOT PERMITTED
2. KEEP CLEAN
3. RoHS COMPLIANT
4. PRINTING:PREMIUM CAT.6 U/UTP AWG26/7 stranded × 4 pairs LSZH Cable
5. Bare COPPER

③	CABLE	CAT.6 U/UTP 26AWG stranded 4pairs cable JACKET:LSZH/BLUE OD=5.1 ± 0.1mm	1 Pcs
②	OVERMOLD	PVC COLOR:BLUE	2 Pcs
①	CONNECTOR	RJ45 8P8C , GOLD PLATED 3-50u" TRANSPARENT RED	2 Pcs
NO.	MAT.NAME	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K8105BL.X	CUSTOMER		EFB
DRAWING		KK0367	TITLE		PATCH CORD
UNIT	mm	SCALE	1:1	REV	
DRAWN BY		CHECK BY	APPRO BY		DATE
Nancy.tang		Mao Yanhua	ZhangLiping		2013.03.13

